




STRATOS

Electromechanical & Electro-Hydraulic Surgical Tables



STRATOS U

electro-hydraulic, tabletop length: **2100mm**, width (with side rails): **580mm**; min. height: **498mm**, max height: **1000mm**, Trendelenburg: **25°**, Reverse-Trendelenburg: **25°**, lateral tilt: **20°**, longitudinal shift: **320 mm**, max load capacity (dynamic): **360 kg**

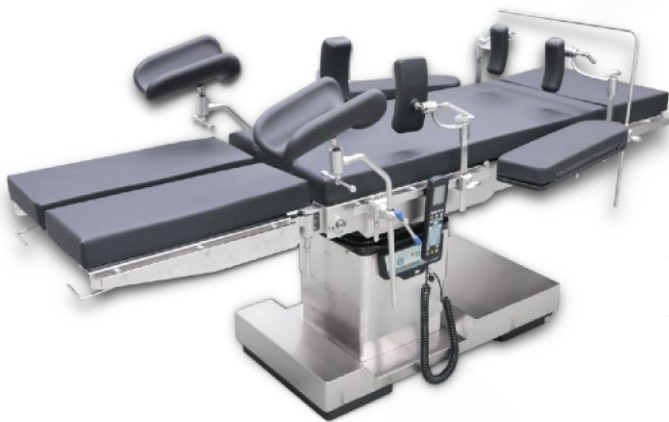

STRATOS S-1 / STRATOS S-2

electro-hydraulic, tabletop length: **2150mm**, width (with side rails): **600mm**; min. height: **720mm**, max height: **1020mm**, Trendelenburg: **26°**, Reverse-Trendelenburg: **26°**, lateral tilt: **20°**, longitudinal shift: **none**, max load capacity (dynamic): **350 kg**.



standard tabletop



tabletop with carbon fiber extension board



STRATOS P

electro-hydraulic, tabletop length: **2000mm (with extension board: 2470mm)**, width (with side rails): **580mm**; min. height: **680mm**, max height: **980mm**, Trendelenburg: **30°**, Reverse-Trendelenburg: **30°**, lateral tilt: **20°**, longitudinal shift: **300mm**, max load capacity (dynamic): **350 kg**.



STRATOS A-1

Electro-mechanic, tabletop length: **2050mm**, width (with side rails): **560mm**; min. height: **700mm**, max height: **1000mm**, Trendelenburg: **30°**, Reverse-Trendelenburg: **30°**, lateral tilt: **20°**, longitudinal shift: **310mm**, max load capacity (dynamic): **200 kg**.



STRATOS

electro-hydraulic, tabletop length: **2000mm (with extension board: 2470mm)**, width (with side rails): **580mm**; min. height: **680mm**, max height: **980mm**, Trendelenburg: **30°**, Reverse-Trendelenburg: **30°**, lateral tilt: **20°**, longitudinal shift: **300mm**, max load capacity (dynamic): **350 kg**.



FABRYKA APARATURY ELEKTROMEDYCZNEJ
FAMED Łódź S.A.
ul. Dostawcza 3D
93-231 Łódź, POLAND



www.famed.pl

info@famed.pl



+40 740 459 209 / office@evohc.ro
www.evohc.ro / www.neo-laser.com



PN-EN ISO 13485:2016